




VERSASNAP STANDING SEAM

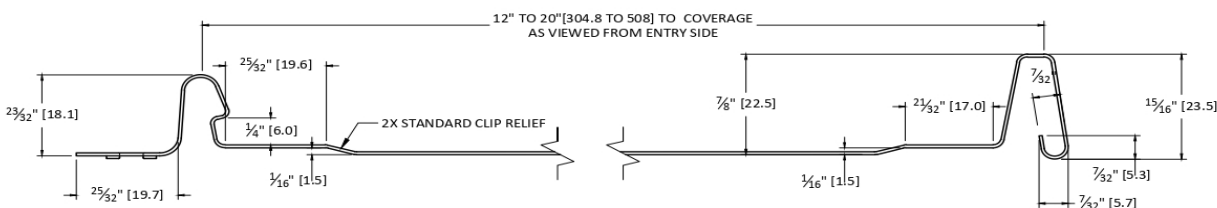

DETAIL A

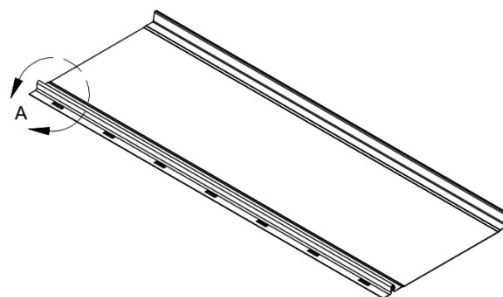

OPTIONAL PANEL PROFILE:

- A) FLAT
- B) BEAD
- C) V-RIB

FINISHES AVAILABLE:

- A) SMP
- B) PVDF
- C) PLAIN GALVALUME

Allowable Strength Design Wind load factor – 1.0 12" Wide Panel – 24 ga. (0.024 in.) Allowable Uniform Load (PSF)						
Span	Deflection	Span Length (Feet)				
		3	3.5	4	4.5	5
1	L/180	36	26	19	14	10
	L/240	35	22	15	10	7
	L/360	23	15	10	7	5
2	L/180	36	26	20	15	12
	L/240	36	26	20	15	11
	L/360	33	21	14	10	7
3	L/180	42	30	23	18	14
	L/240	42	30	23	18	14
	L/360	42	27	18	13	9

Note:

- Load data based on ASTM A792, G50 (Fy=50ksi).
- Panel data are subject to change upon Engineer's review, project-specific, and site condition.